


# CMPS 3130/6130 Computational Geometry Spring 2015

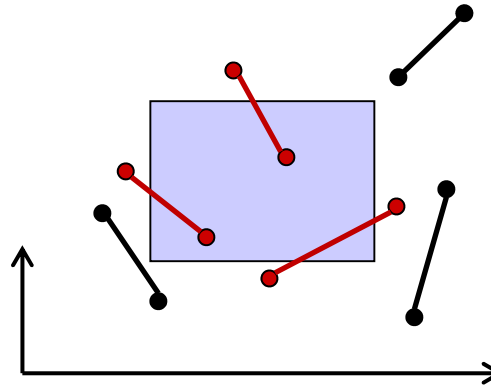


## *Windowing*

**Carola Wenk**

# Windowing

**Input:** A set  $S$  of  $n$  line segments in the plane

**Query:** Report all segments in  $S$  that intersect a given query window

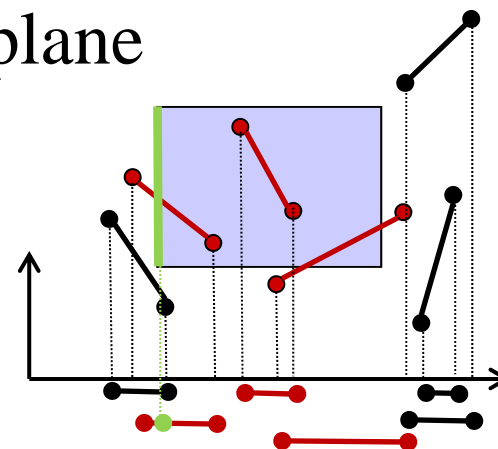

**Subproblem:** Process a set of intervals on the line into a data structure which supports queries of the type: Report all intervals that contain a query point.

⇒ Interval trees


⇒ Segment trees

# Interval Trees


**Input:** A set  $I$  of  $n$  intervals on the line.

**Idea:** Partition  $I$  into  $I_{\text{left}} \dot{\cup} I_{\text{mid}} \dot{\cup} I_{\text{right}}$  where  $x_{\text{mid}}$  is the median of the  $2n$  endpoints.

Store  $I_{\text{mid}}$  twice as two lists of intervals:  $L_{\text{left}}$  sorted by left endpoint and as  $L_{\text{right}}$  sorted by right endpoint.

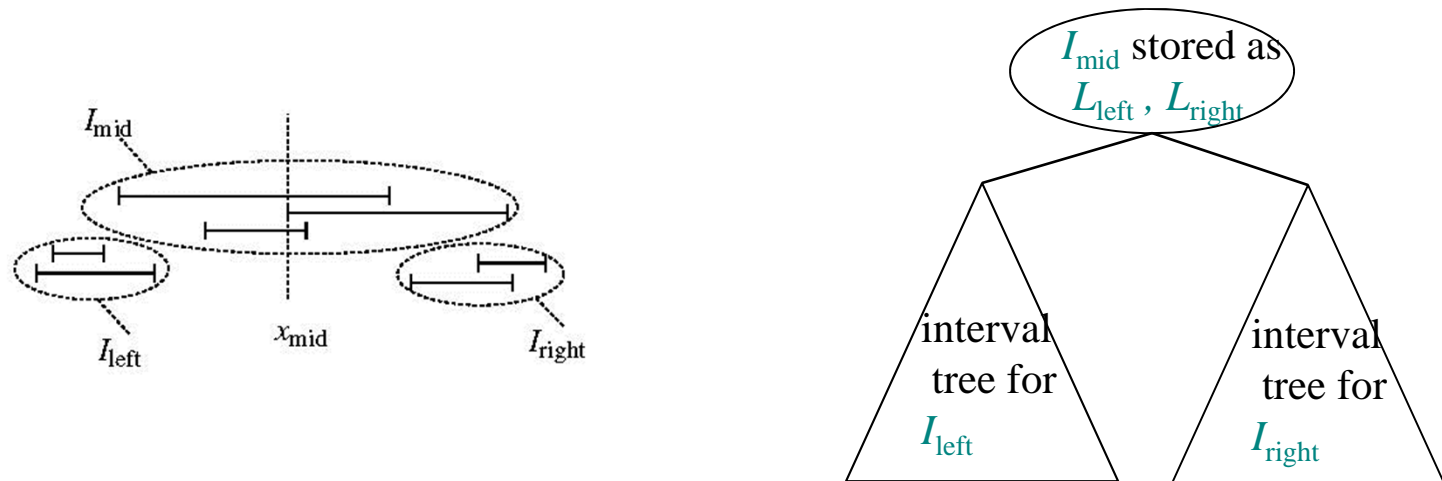

# Interval Trees

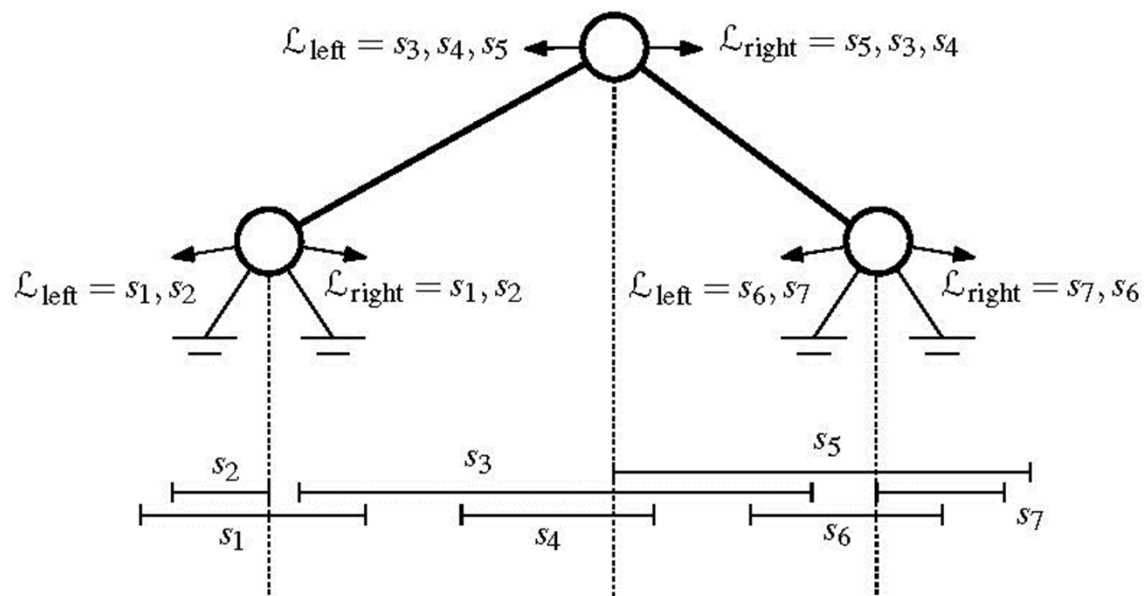

**Lemma:** An interval tree on a set of  $n$  intervals uses  $O(n)$  space and has height  $O(\log n)$ . It can be constructed recursively in  $O(n \log n)$  time.

**Proof:** Each interval is stored in a set  $I_{\text{mid}}$  only once, hence  $O(n)$  space. In the worst case half the intervals are to the left and right of  $x_{\text{mid}}$ , hence the height is  $O(\log n)$ . Constructing the (sorted) lists takes  $O(|I^v| + |I^v_{\text{mid}}| \log |I^v_{\text{mid}}|)$  time per vertex  $v$ . □

# Interval Tree Query

**Algorithm** QUERYINTERVALTREE( $v, q_x$ )

*Input.* The root  $v$  of an interval tree and a query point  $q_x$ .

*Output.* All intervals that contain  $q_x$ .


1. **if**  $v$  is not a leaf
2.     **then if**  $q_x < x_{\text{mid}}(v)$
3.         **then** Walk along the list  $\mathcal{L}_{\text{left}}(v)$ , starting at the interval with the leftmost endpoint, reporting all the intervals that contain  $q_x$ . Stop as soon as an interval does not contain  $q_x$ .
4.         QUERYINTERVALTREE( $lc(v), q_x$ )
5.     **else** Walk along the list  $\mathcal{L}_{\text{right}}(v)$ , starting at the interval with the rightmost endpoint, reporting all the intervals that contain  $q_x$ . Stop as soon as an interval does not contain  $q_x$ .
6.         QUERYINTERVALTREE( $rc(v), q_x$ )

**Theorem:** An interval tree on a set of  $n$  intervals can be constructed in  $O(n \log n)$  time and uses  $O(n)$  space. All intervals that contain a query point can be reported in  $O(\log n + k)$  time, where  $k = \#$ reported intervals.

**Proof:** We spend  $O(1+k_v)$  time at vertex  $v$ , where  $k_v = \#$ intervals reported at  $v$ . We visit at most 1 node at any depth. □


# Segment Trees

- Let  $I = \{s_1, \dots, s_n\}$  be a set of  $n$  intervals (segments), and let  $p_1, p_2, \dots, p_m$  be the sorted list of distinct interval endpoints of  $I$ .
- Partition the real line into **elementary intervals**:  
 $(-\infty, p_1), [p_1, p_1], (p_1, p_2), \dots, (p_{m-1}, p_m), [p_m, p_m], (p_m, \infty)$
- Construct a balanced binary search tree  $T$  with leaves corresponding to the elementary intervals

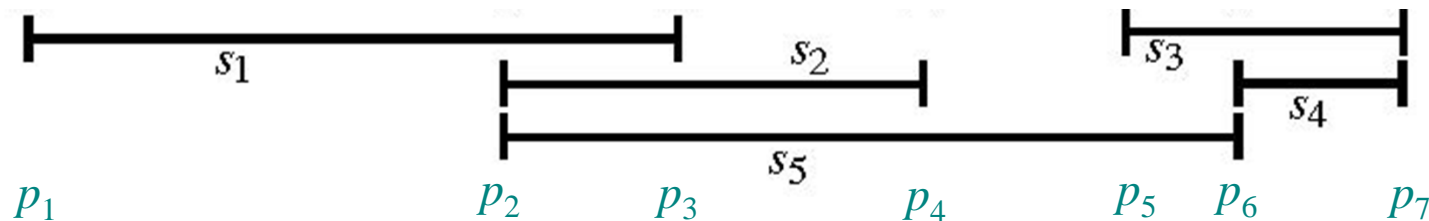

# Elementary Intervals

- $\text{Int}(\mu)$ : elementary interval corresponding to leaf  $\mu$
- $\text{Int}(v)$ : union of  $\text{Int}(\mu)$  of all leaves in subtree rooted at  $v$

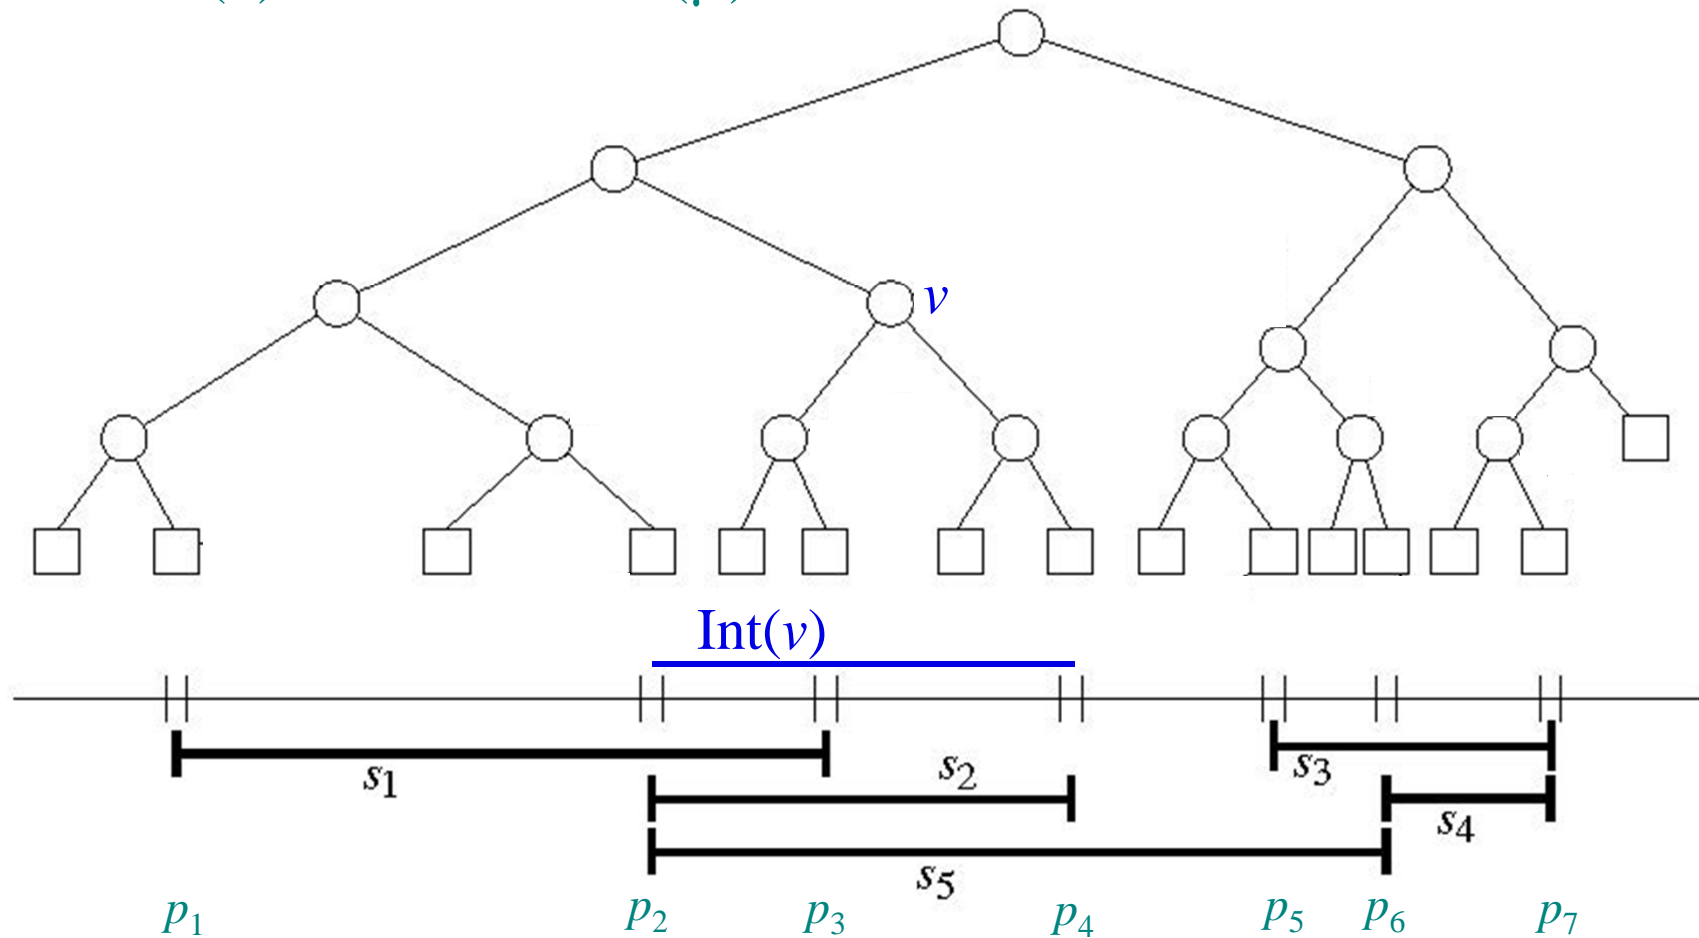


# Segment Trees

Store segments as high as possible

Each vertex  $v$  stores (1)  $\text{Int}(v)$  and (2) the canonical subset  $I(v) \subseteq I$ :

$$I(v) := \{s \in I \mid \text{Int}(v) \subseteq s \text{ and } \text{Int}(\text{parent}(v)) \not\subseteq s\}$$

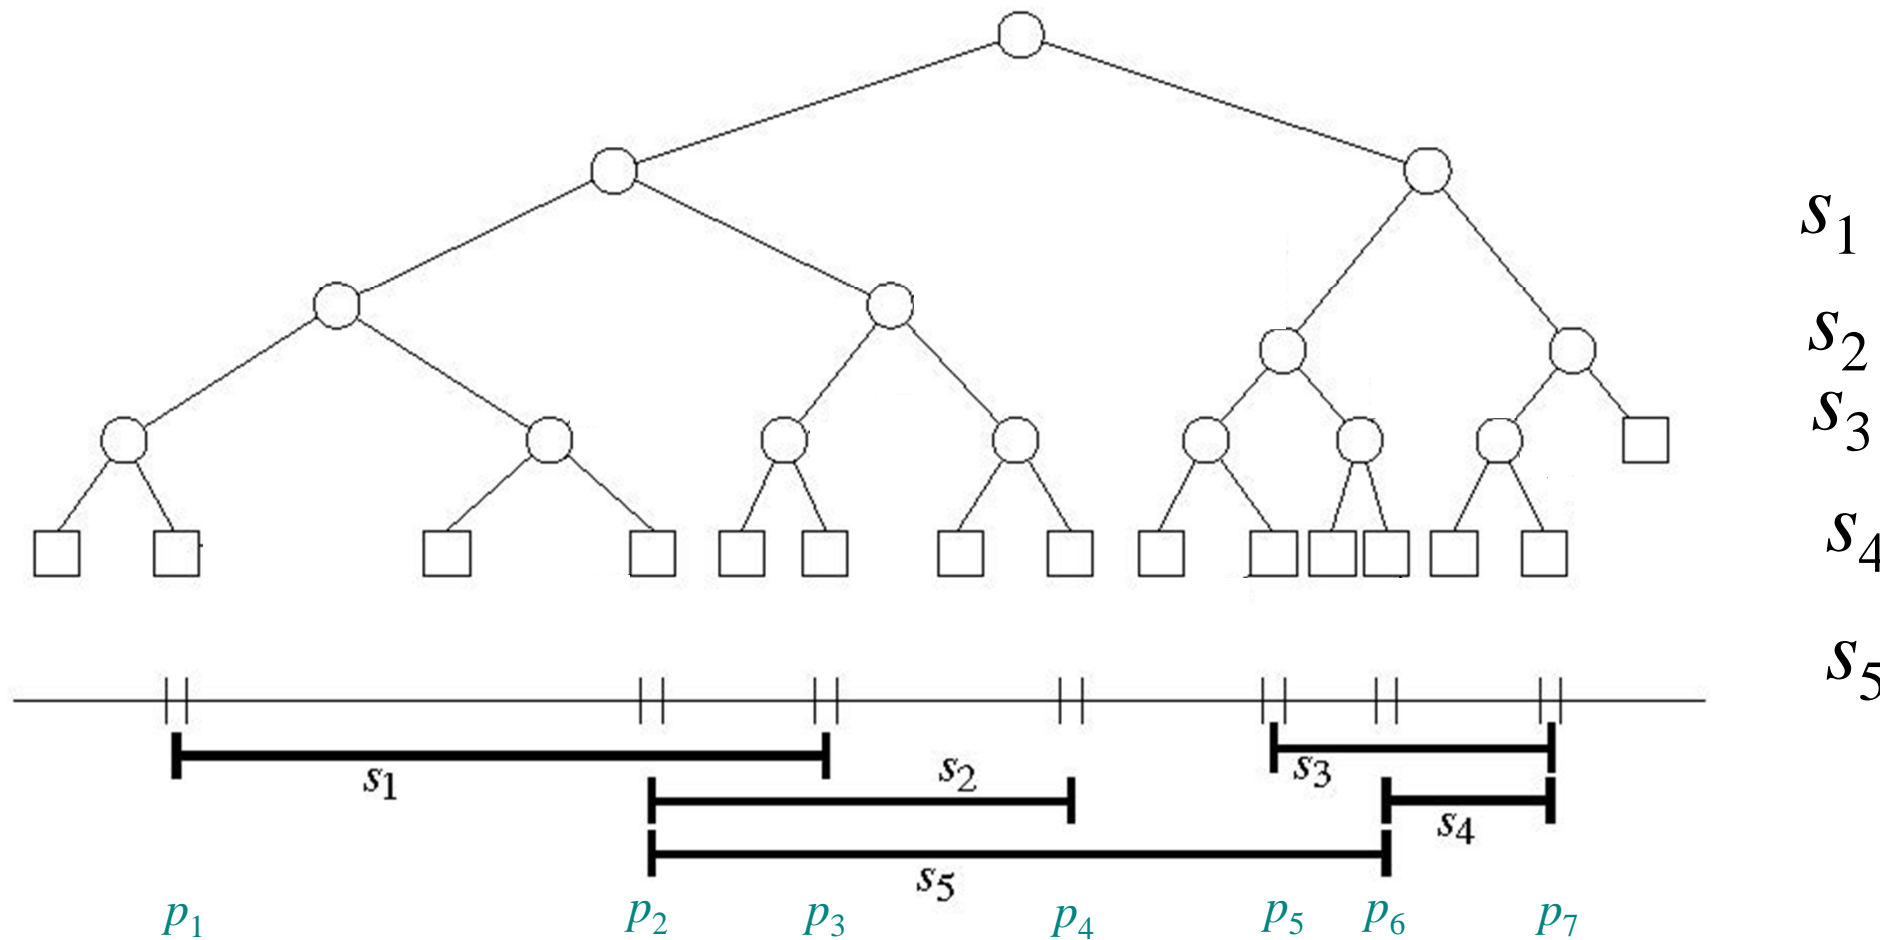




# Segment Trees

Store segments as high as possible

Each vertex  $v$  stores (1)  $\text{Int}(v)$  and (2) the canonical subset  $I(v) \subseteq I$ :

$$I(v) := \{s \in I \mid \text{Int}(v) \subseteq s \text{ and } \text{Int}(\text{parent}(v)) \not\subseteq s\}$$

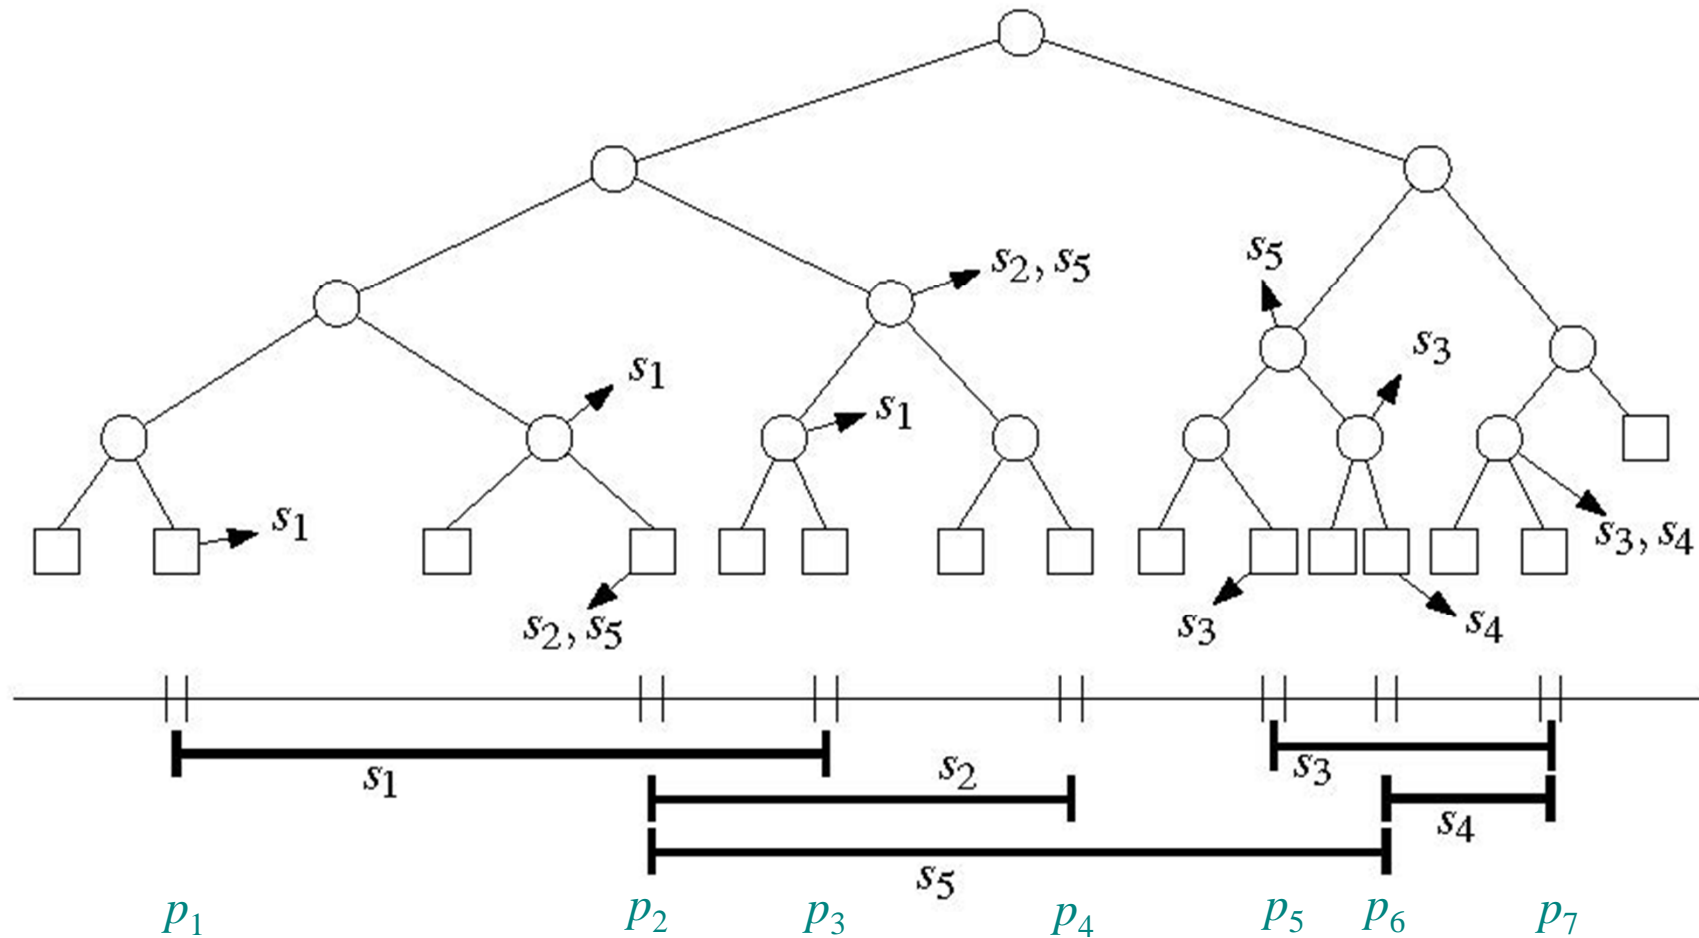


# Space

**Lemma:** A segment tree on  $n$  intervals uses  $O(n \log n)$  space.

**Proof:** Any interval  $s$  is stored in at most two sets  $I(v_1)$ ,  $I(v_2)$  for two different vertices  $v_1, v_2$  at the same level of  $T$ . [If  $s$  was stored in  $I(v_3)$  for a third vertex  $v_3$ , then  $s$  would have to span from left to right, and  $\text{Int}(\text{parent}(v_2)) \subseteq s$ , hence  $s$  is cannot be stored in  $v_2$ .]

The tree is a balanced tree of height  $O(\log n)$ .

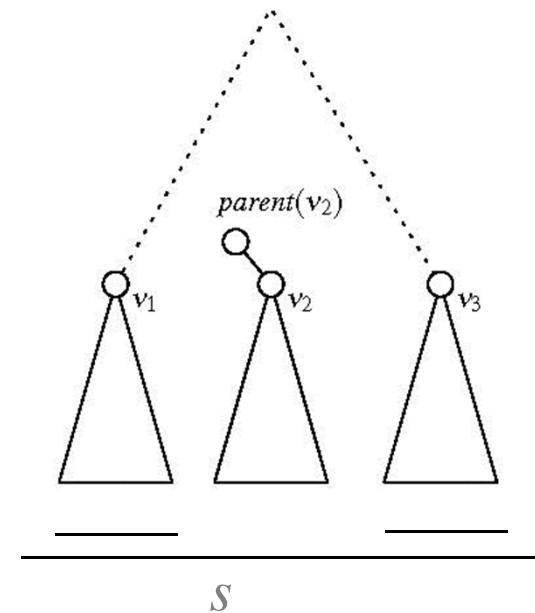

# Segment Tree Query

**Algorithm** QUERYSEGMENTTREE( $v, q_x$ )

*Input.* The root of a (subtree of a) segment tree and a query point  $q_x$ .

*Output.* All intervals in the tree containing  $q_x$ .

1. Report all the intervals in  $I(v)$ .
2. **if**  $v$  is not a leaf
3.     **then if**  $q_x \in \text{Int}(lc(v))$
4.         **then** QUERYSEGMENTTREE( $lc(v), q_x$ )
5.         **else** QUERYSEGMENTTREE( $rc(v), q_x$ )

## Runtime Analysis:

- Visit one node per level.
  - Spend  $O(1+k_v)$  time per node  $v$ .
- $\Rightarrow$  Runtime  $O(\log n + k)$



# Segment Tree Construction

- $O(n \log n)$  {
1. Sort interval endpoints of  $I$ .  $\rightarrow$  elementary intervals
  2. Construct balanced BST on elementary intervals.
  3. Determine  $\text{Int}(v)$  bottom-up.
  4. Compute canonical subsets by incrementally inserting intervals  $s=[x,x'] \in I$  into  $T$  using `InsertSegmentTree`:

**Algorithm** INSERTSEGMENTTREE( $v, s$ )

*Input.* The root of a (subtree of a) segment tree and an interval.

*Output.* The interval will be stored in the subtree.

1. **if**  $\text{Int}(v) \subseteq s$
2.     **then** store  $s$  at  $v$
3.     **else if**  $\text{Int}(lc(v)) \cap s \neq \emptyset$
4.         **then** INSERTSEGMENTTREE( $lc(v), s$ )
5.     **if**  $\text{Int}(rc(v)) \cap s \neq \emptyset$
6.         **then** INSERTSEGMENTTREE( $rc(v), s$ )

# Segment Trees

## Runtime:

- Each interval stored at most twice per level
  - At most one node per level that contains the left endpoint of  $s$  (same with right endpoint)
- Visit at most 4 nodes per level
- $O(\log n)$  per interval, and  $O(n \log n)$  total


**Theorem:** A segment tree for a set of  $n$  intervals can be built in  $O(n \log n)$  time and uses  $O(n \log n)$  space. All intervals that contain a query point can be reported in  $O(\log n + k)$  time.

# 2D Windowing Revisited

**Input:** A set  $S$  of  $n$  disjoint line segments in the plane

**Task:** Process  $S$  into a data structure such that all segments intersecting a

**vertical query segment**  $q := q_x \times [q_y, q'_y]$   
can be reported efficiently.


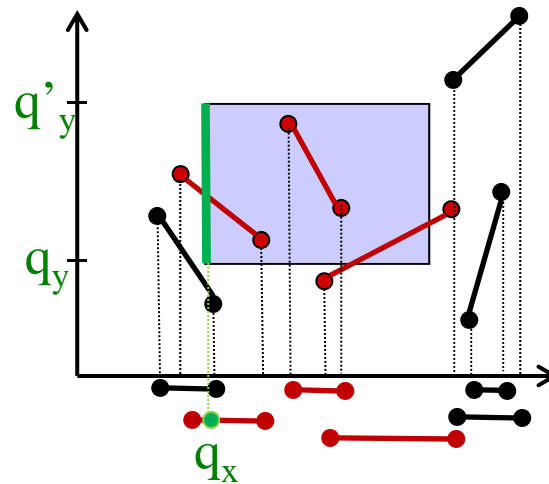


# 2D Windowing Revisited

## Solution:

### Segment tree with nested range tree




- Build segment tree  $T$  based on  $x$ -intervals of segments in  $S$ .  
 → each  $\text{Int}(v) \cong \text{Int}(v) \times (-\infty, \infty)$   
 vertical slab
- $I(v) \cong S(v)$  canonical set of segments spanning vertical slab
- Store  $S(v)$  in 1D range tree (binary search tree)  $T(v)$  based on vertical order of segments

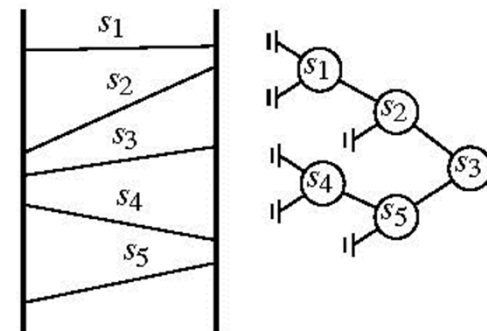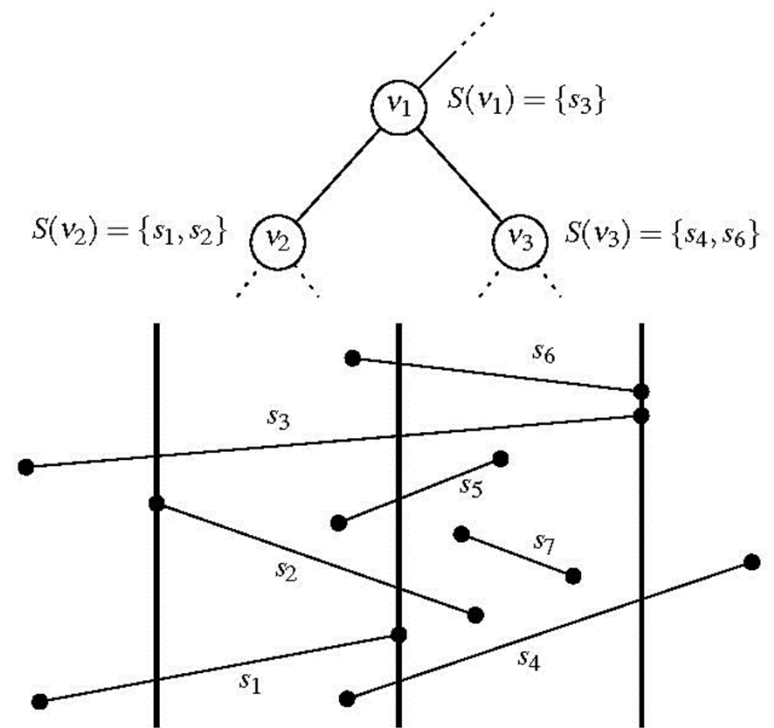

# 2D Windowing Revisited

## Query algorithm:

- Search regularly for  $q_x$  in  $T$
  - In every visited vertex  $v$  report segments in  $T(v)$  between  $q_y$  and  $q'_y$  (1D range query)
- $\Rightarrow O(\log n + k_v)$  time for  $T(v)$   
 $\Rightarrow O(\log^2 n + k)$  total

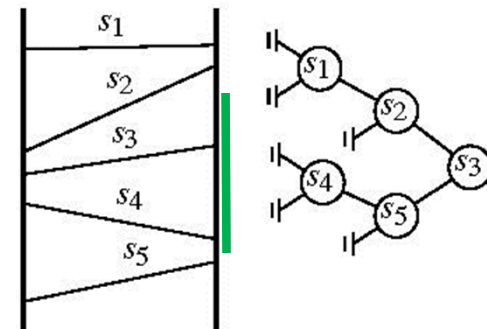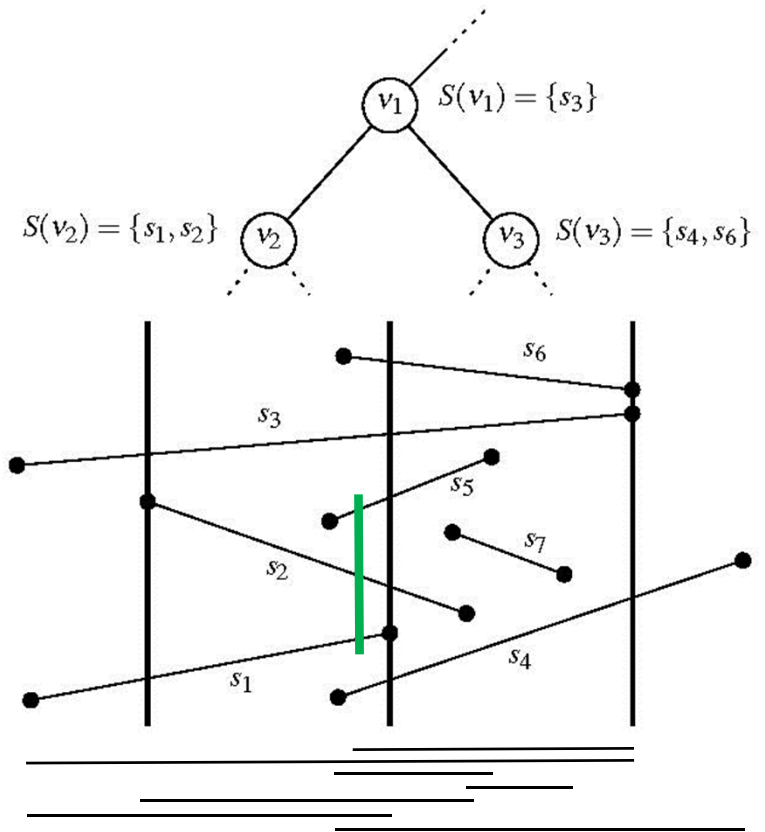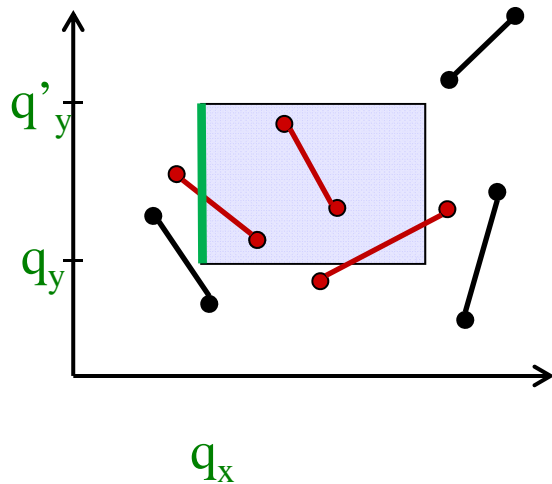



# 2D Windowing Summary

**Theorem:** Let  $S$  be a set of (interior-) disjoint line segments in the plane. The segments intersecting a vertical query segment (or an axis-parallel rectangular query window) can be reported in  $O(\log^2 n + k)$  time, with  $O(n \log n)$  preprocessing time and  $O(n \log n)$  space.

