




CS 5633 -- Spring 2008



Union-Find Data Structures

Carola Wenk

Slides courtesy of Charles Leiserson with small changes by Carola Wenk

3/25/08

CS 5633 Analysis of Algorithms

1



Disjoint-set data structure (Union-Find)

Problem:

- Maintain a dynamic collection of *pairwise-disjoint* sets $\mathcal{S} = \{S_1, S_2, \dots, S_r\}$.
- Each set S_i has one element distinguished as the representative element, $rep[S_i]$.
- Must support 3 operations:
 - MAKE-SET(x): adds new set $\{x\}$ to \mathcal{S} with $rep[\{x\}] = x$ (for any $x \notin S_i$ for all i)
 - UNION(x, y): replaces sets S_x, S_y with $S_x \cup S_y$ in \mathcal{S} (for any x, y in distinct sets S_x, S_y)
 - FIND-SET(x): returns representative $rep[S_x]$ of set S_x containing element x

3/25/08

CS 5633 Analysis of Algorithms

2



Union-Find Example

MAKE-SET(2)	$S = \{\}$	The representative is underlined
MAKE-SET(3)	$S = \{\underline{2}\}$	
MAKE-SET(4)	$S = \{\underline{2}, \underline{3}\}$	
FIND-SET(4) = 4	$S = \{\underline{2}, \underline{3}, \underline{4}\}$	
UNION(2, 4)	$S = \{\underline{2}, 4, \underline{3}\}$	
FIND-SET(4) = 2	$S = \{\underline{2}, 4, \underline{3}, \underline{5}\}$	
MAKE-SET(5)	$S = \{\underline{2}, 4, \underline{3}, \underline{5}\}$	
UNION(4, 5)	$S = \{\underline{2}, 4, 5, \underline{3}\}$	

3/25/08

CS 5633 Analysis of Algorithms

3



Disjoint-set data structure (Union-Find) II

- In all operations pointers to the elements x, y in the data structure are given.
- Hence, we do not need to first search for the element in the data structure.
- Let n denote the overall number of elements (equivalently, the number of MAKE-SET operations).

3/25/08


CS 5633 Analysis of Algorithms

4



Simple linked-list solution

Store each set $S_i = \{x_1, x_2, \dots, x_k\}$ as an (unordered) doubly linked list. Define representative element $rep[S_i]$ to be the front of the list, x_1 .



- $\Theta(1)$ • MAKE-SET(x) initializes x as a lone node.
- $\Theta(1)$ • FIND-SET(x) walks left in the list containing x until it reaches the front of the list.
- $\Theta(n)$ • UNION(x, y) calls FIND-SET on y , finds the last element of list x , and concatenates both lists, leaving rep. as FIND-SET[x].

3/25/08

CS 5633 Analysis of Algorithms

5



Simple balanced-tree solution

Store each set $S_i = \{x_1, x_2, \dots, x_k\}$ as a balanced tree (ignoring keys). Define representative element $rep[S_i]$ to be the root of the tree.

- $S_i = \{x_1, x_2, x_3, x_4, x_5\}$
- $\Theta(1)$ • MAKE-SET(x) initializes x as a lone node.
 - $\Theta(\log n)$ • FIND-SET(x) walks up the tree containing x until reaching root.
 - $\Theta(\log n)$ • UNION(x, y) calls FIND-SET on y , finds a leaf of x and concatenates both trees, changing rep. of y .
-

How?

3/25/08

CS 5633 Analysis of Algorithms

6



Plan of attack

- We will build a simple disjoint-union data structure that, in an **amortized sense**, performs significantly better than $\Theta(\log n)$ per op., even better than $\Theta(\log \log n)$, $\Theta(\log \log \log n)$, ..., but not quite $\Theta(1)$.
- To reach this goal, we will introduce two key **tricks**. Each trick converts a trivial $\Theta(n)$ solution into a simple $\Theta(\log n)$ amortized solution. Together, the two tricks yield a much better solution.
- First trick arises in an augmented linked list. Second trick arises in a tree structure.

3/25/08


CS 5633 Analysis of Algorithms

7



Augmented linked-list solution

Store $S_i = \{x_1, x_2, \dots, x_k\}$ as unordered doubly linked list. **Augmentation:** Each element x_j also stores pointer $rep[x_j]$ to $rep[S_i]$ (which is the front of the list, x_1).

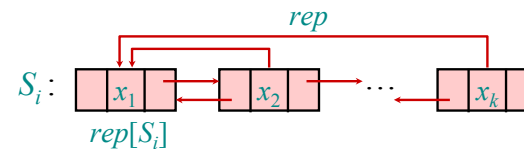

- FIND-SET(x) returns $rep[x]$. — $\Theta(1)$
- UNION(x, y) concatenates lists containing x and y and updates the rep pointers for all elements in the list containing y . — $\Theta(n)$

3/25/08

CS 5633 Analysis of Algorithms

8




Example of augmented linked-list solution

Each element x_j stores pointer $rep[x_j]$ to $rep[S_i]$.

$UNION(x, y)$

- concatenates the lists containing x and y , and
- updates the rep pointers for all elements in the list containing y .

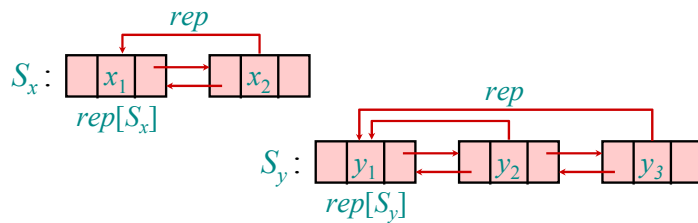

3/25/08

CS 5633 Analysis of Algorithms

9




Example of augmented linked-list solution

Each element x_j stores pointer $rep[x_j]$ to $rep[S_i]$.

$UNION(x, y)$

- concatenates the lists containing x and y , and
- updates the rep pointers for all elements in the list containing y .

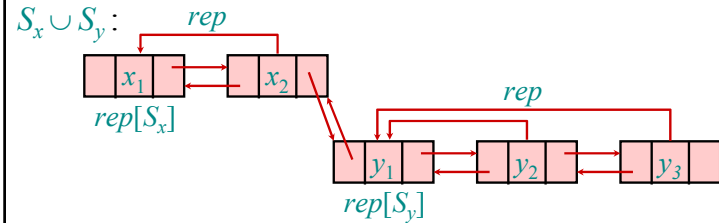

3/25/08

CS 5633 Analysis of Algorithms

10




Example of augmented linked-list solution

Each element x_j stores pointer $rep[x_j]$ to $rep[S_i]$.

$UNION(x, y)$

- concatenates the lists containing x and y , and
- updates the rep pointers for all elements in the list containing y .

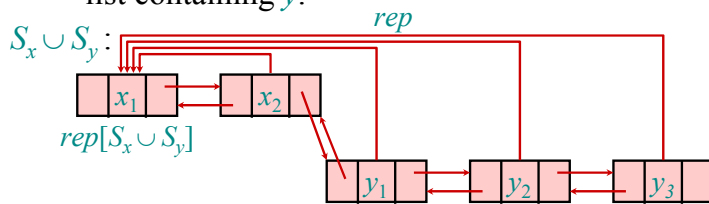

3/25/08

CS 5633 Analysis of Algorithms


11



Alternative concatenation

$UNION(x, y)$ could instead

- concatenate the lists containing y and x , and
- update the rep pointers for all elements in the list containing x .

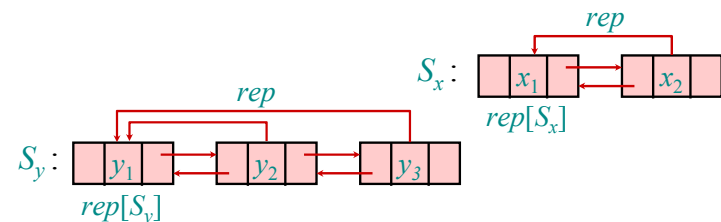

3/25/08

CS 5633 Analysis of Algorithms


12



Alternative concatenation

UNION(x, y) could instead

- concatenate the lists containing y and x , and
- update the rep pointers for all elements in the list containing x .

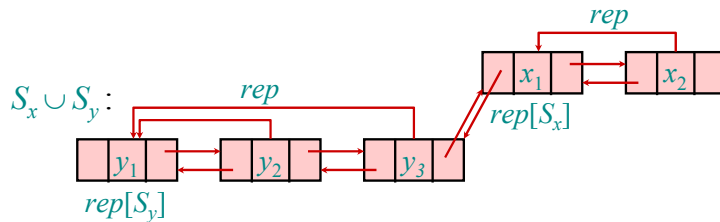

3/25/08

CS 5633 Analysis of Algorithms


13



Alternative concatenation

UNION(x, y) could instead

- concatenate the lists containing y and x , and
- update the rep pointers for all elements in the list containing x .

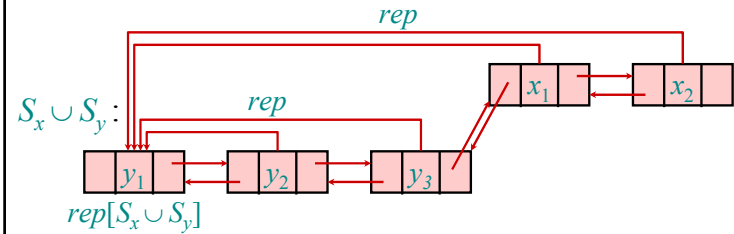

3/25/08

CS 5633 Analysis of Algorithms

14



Trick 1: Smaller into larger (weighted-union heuristic)

To save work, concatenate smaller list onto the end of the larger list. Cost = Θ (length of smaller list). Augment list to store its **weight** (# elements).

- Let n denote the overall number of elements (equivalently, the number of MAKE-SET operations).
- Let m denote the total number of operations.
- Let f denote the number of FIND-SET operations.

Theorem: Cost of all UNION's is $O(n \log n)$.

Corollary: Total cost is $O(m + n \log n)$.

3/25/08

CS 5633 Analysis of Algorithms

15



Analysis of Trick 1 (weighted-union heuristic)

Theorem: Total cost of UNION's is $O(n \log n)$.

- Proof.**
- Monitor an element x and set S_x containing it.
 - After initial MAKE-SET(x), $weight[S_x] = 1$.
 - Each time S_x is united with S_y :
 - if $weight[S_y] \geq weight[S_x]$:
 - pay 1 to update $rep[x]$, and
 - $weight[S_x]$ at least doubles (increases by $weight[S_y]$).
 - if $weight[S_y] < weight[S_x]$:
 - pay nothing, and
 - $weight[S_x]$ only increases.
- Thus pay $\leq \log n$ for x .

3/25/08

CS 5633 Analysis of Algorithms

16




Disjoint set forest: Representing sets as trees

Store each set $S_i = \{x_1, x_2, \dots, x_k\}$ as an unordered, potentially unbalanced, not necessarily binary tree, storing only *parent* pointers. $rep[S_i]$ is the tree root.

- MAKE-SET(x) initializes x as a lone node. $-\Theta(1)$
- FIND-SET(x) walks up the tree containing x until it reaches the root. $-\Theta(\text{depth}[x])$
- UNION(x, y) calls FIND-SET twice and concatenates the trees containing x and y . $-\Theta(\text{depth}[x])$

$$S_i = \{x_1, x_2, x_3, x_4, x_5, x_6\}$$



3/25/08

CS 5633 Analysis of Algorithms

17




Trick 1 adapted to trees

- UNION(x, y) can use a simple concatenation strategy: Make root FIND-SET(y) a child of root FIND-SET(x).
 \Rightarrow FIND-SET(y) = FIND-SET(x).

- Adapt Trick 1 to this context:

Union-by-weight:

Merge tree with smaller weight into tree with larger weight.

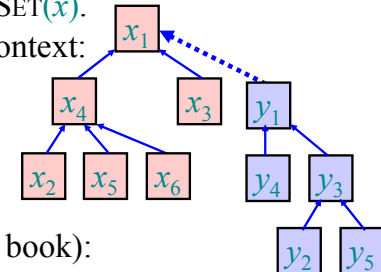

- Variant of Trick 1 (see book):

Union-by-rank:

rank of a tree = its height

3/25/08

CS 5633 Analysis of Algorithms

18



Trick 1 adapted to trees (union-by-weight)

- Height of tree is logarithmic in weight, because:
 - Induction on n
 - Height of a tree T is determined by the two subtrees T_1, T_2 that T has been united from.
 - Inductively the heights of T_1, T_2 are the logs of their weights.
 - If T_1 and T_2 have different heights:

$$\begin{aligned} \text{height}(T) &= \max(\text{height}(T_1), \text{height}(T_2)) \\ &= \max(\log \text{weight}(T_1), \log \text{weight}(T_2)) \\ &< \log \text{weight}(T) \end{aligned}$$
 - If T_1 and T_2 have the same heights:

$$\begin{aligned} \text{height}(T) &= \text{height}(T_1) + 1 \leq 2 * \log \text{weight}(T_1) \\ &\leq \log \text{weight}(T) \end{aligned}$$
- Thus the total cost of any m operations is $O(m \log n)$.

3/25/08

CS 5633 Analysis of Algorithms

19




Trick 2: Path compression

When we execute a FIND-SET operation and walk up a path p to the root, we know the representative for all the nodes on path p .

Path compression makes all of those nodes direct children of the root.

Cost of FIND-SET(x) is still $\Theta(\text{depth}[x])$.

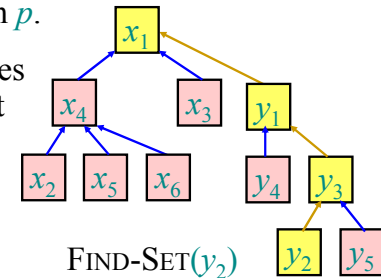

3/25/08

CS 5633 Analysis of Algorithms

20




Trick 2: Path compression

When we execute a FIND-SET operation and walk up a path p to the root, we know the representative for all the nodes on path p .

Path compression makes all of those nodes direct children of the root.

Cost of FIND-SET(x) is still $\Theta(\text{depth}[x])$.

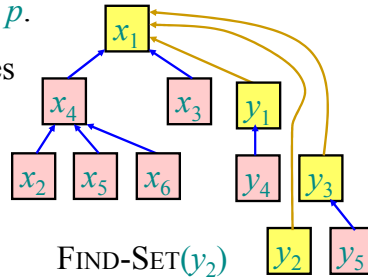


Trick 2: Path compression

When we execute a FIND-SET operation and walk up a path p to the root, we know the representative for all the nodes on path p .

Path compression makes all of those nodes direct children of the root.

Cost of FIND-SET(x) is still $\Theta(\text{depth}[x])$.

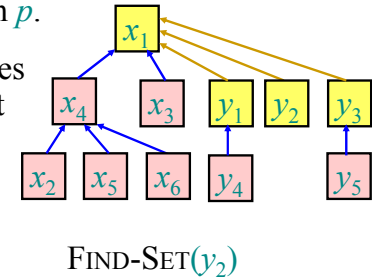

Trick 2: Path compression

- Note that UNION(x,y) first calls FIND-SET(x) and FIND-SET(y). Therefore path compression also affects UNION operations.



Analysis of Trick 2 alone

Theorem: Total cost of FIND-SET's is $O(m \log n)$.

Proof: By amortization. Omitted.



Ackermann's function A , and its "inverse" α

Define $A_k(j) = \begin{cases} j+1 & \text{if } k=0, \\ A_{k-1}^{(j+1)}(j) & \text{if } k \geq 1. \end{cases}$ – iterate $j+1$ times

$$A_0(j) = j + 1$$

$$A_0(1) = 2$$

$$A_1(j) \sim 2j$$

$$A_1(1) = 3$$

$$A_2(j) \sim 2j \cdot 2^j > 2^j$$

$$A_2(1) = 7$$

$$A_3(1) = 2047$$

$$A_3(j) > 2^{2^{2^{\dots^{2^j}}}}$$

$$A_4(j) \text{ is a lot bigger. } A_4(1) > 2^{2^{2^{\dots^{2^{2047}}}}}$$

} 2048 times

Define $\alpha(n) = \min \{k : A_k(1) \geq n\} \leq 4$ for practical n .



Analysis of Tricks 1 + 2 for disjoint-set forests

Theorem: In general, total cost is $O(m \alpha(n))$.

(long, tricky proof – see Section 21.4 of CLRS)



Application: Dynamic connectivity

Suppose a graph is given to us *incrementally* by

- ADD-VERTEX(v)
- ADD-EDGE(u, v)

and we want to support *connectivity* queries:

- CONNECTED(u, v):
Are u and v in the same connected component?

For example, we want to maintain a spanning forest, so we check whether each new edge connects a previously disconnected pair of vertices.



Application: Dynamic connectivity

Sets of vertices represent *connected components*.

Suppose a graph is given to us *incrementally* by

- ADD-VERTEX(v) : MAKE-SET(v)
- ADD-EDGE(u, v) : **if** not CONNECTED(u, v)
then UNION(v, w)

and we want to support *connectivity* queries:

- CONNECTED(u, v): : FIND-SET(u) = FIND-SET(v)
Are u and v in the same connected component?

For example, we want to maintain a spanning forest, so we check whether each new edge connects a previously disconnected pair of vertices.