



CS 3343 – Fall 2010

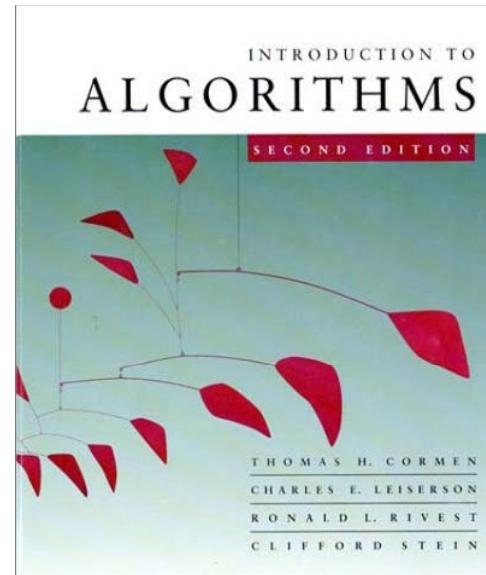

More on Shortest Paths

Carola Wenk


Slides courtesy of Charles Leiserson with small changes by Carola Wenk




Negative-weight cycles

Recall: If a graph $G = (V, E)$ contains a negative-weight cycle, then some shortest paths may not exist.

Example:

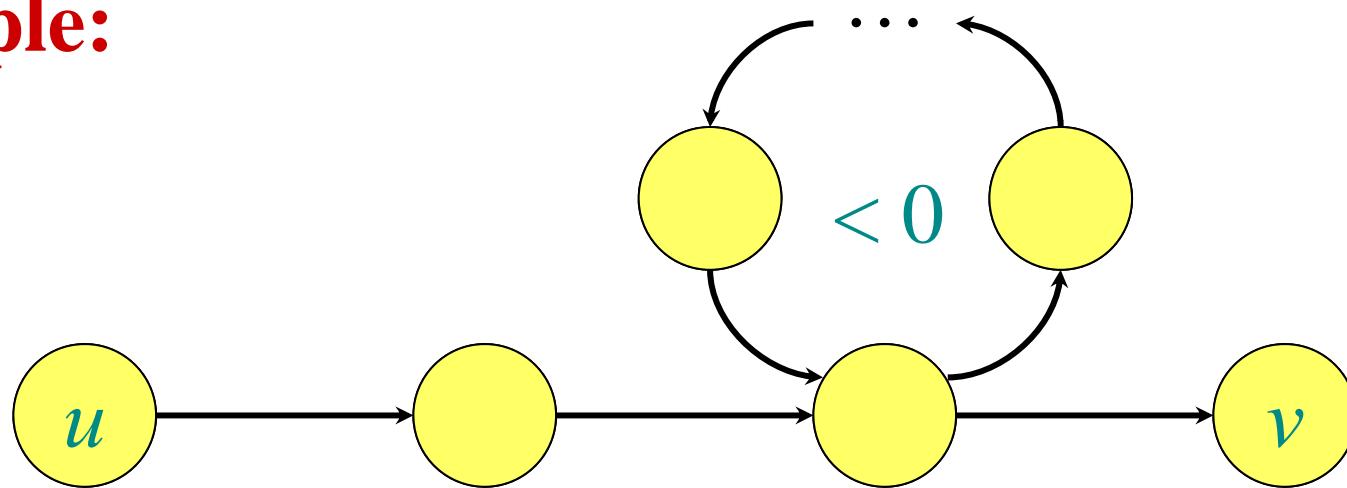

Bellman-Ford algorithm: Finds all shortest-path weights from a *source* $s \in V$ to all $v \in V$ or determines that a negative-weight cycle exists.




Bellman-Ford algorithm

```
d[s] ← 0
for each  $v \in V - \{s\}$ 
  do  $d[v] \leftarrow \infty$  } initialization

for  $i \leftarrow 1$  to  $|V| - 1$  do
  for each edge  $(u, v) \in E$  do
    if  $d[v] > d[u] + w(u, v)$  then
       $d[v] \leftarrow d[u] + w(u, v)$ 
       $\pi[v] \leftarrow u$  } relaxation step


  for each edge  $(u, v) \in E$ 
    do if  $d[v] > d[u] + w(u, v)$ 
      then report that a negative-weight cycle exists

At the end,  $d[v] = \delta(s, v)$ . Time =  $O(|V||E|)$ .
```




Example of Bellman-Ford

Order of edges: (B,E) , (D,B) , (B,D) , (A,B) , (A,C) , (D,C) , (B,C) , (E,D)

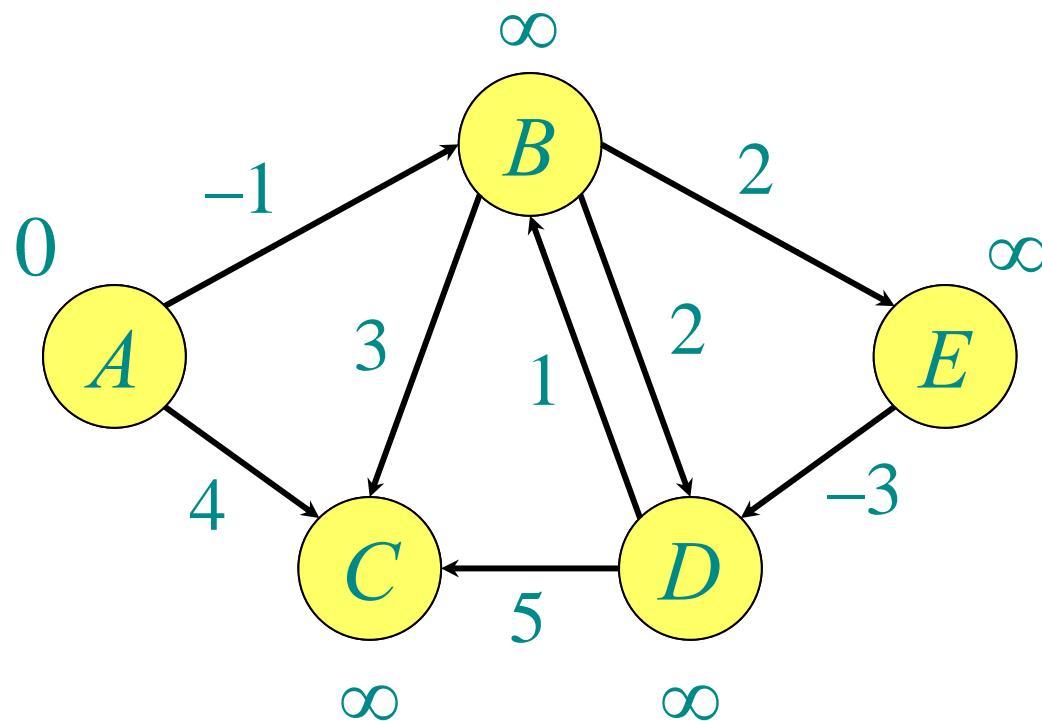


A	B	C	D	E
0	∞	∞	∞	∞




Example of Bellman-Ford

Order of edges: (B,E) , (D,B) , (B,D) , (A,B) , (A,C) , (D,C) , (B,C) , (E,D)

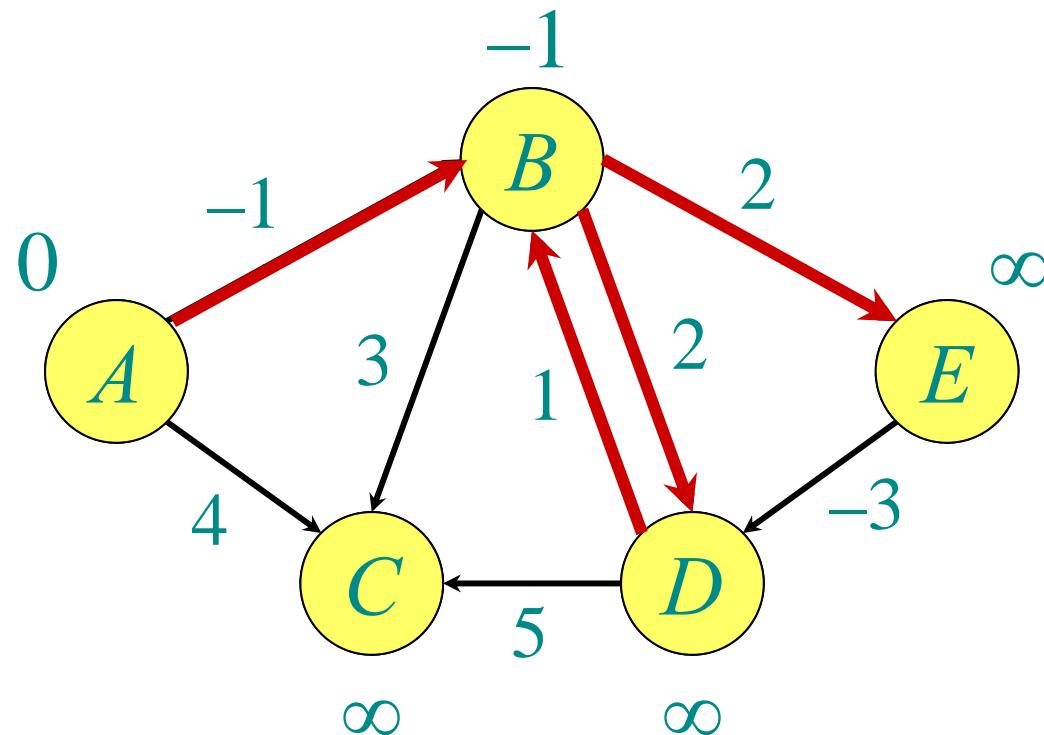


A	B	C	D	E
0	infinity	infinity	infinity	infinity
0	-1	infinity	infinity	infinity




Example of Bellman-Ford

Order of edges: (B,E) , (D,B) , (B,D) , (A,B) , (A,C) , (D,C) , (B,C) , (E,D)

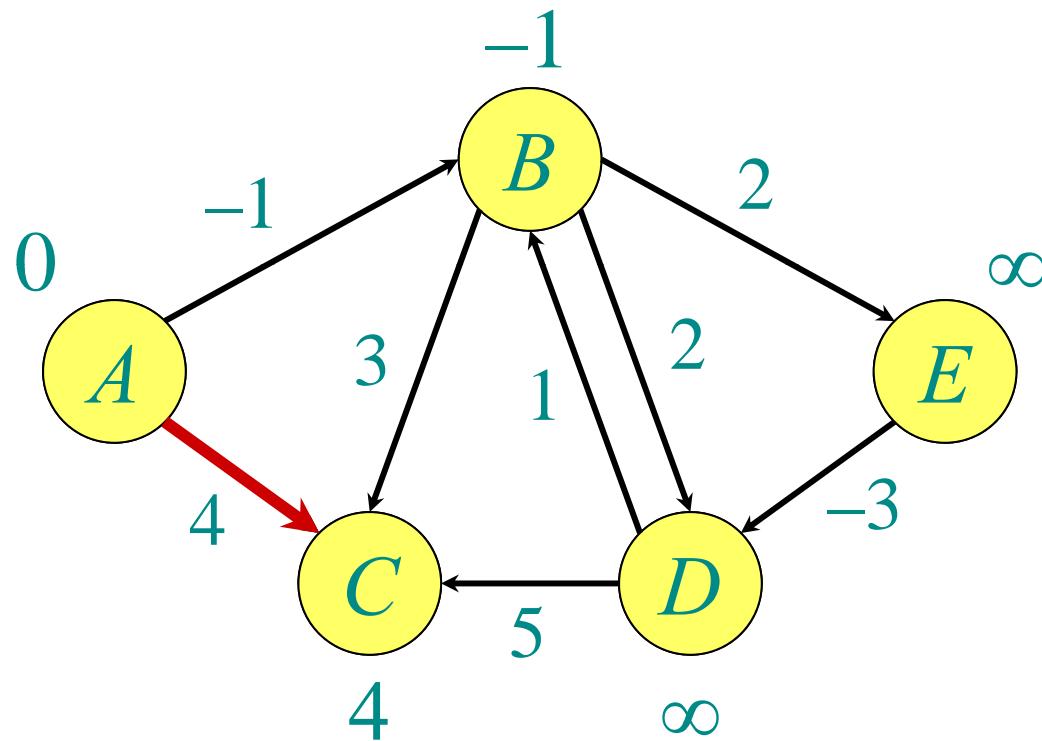


A	B	C	D	E
0	∞	∞	∞	∞
0	-1	∞	∞	∞
0	-1	4	∞	∞




Example of Bellman-Ford

Order of edges: (B,E) , (D,B) , (B,D) , (A,B) , (A,C) , (D,C) , (B,C) , (E,D)

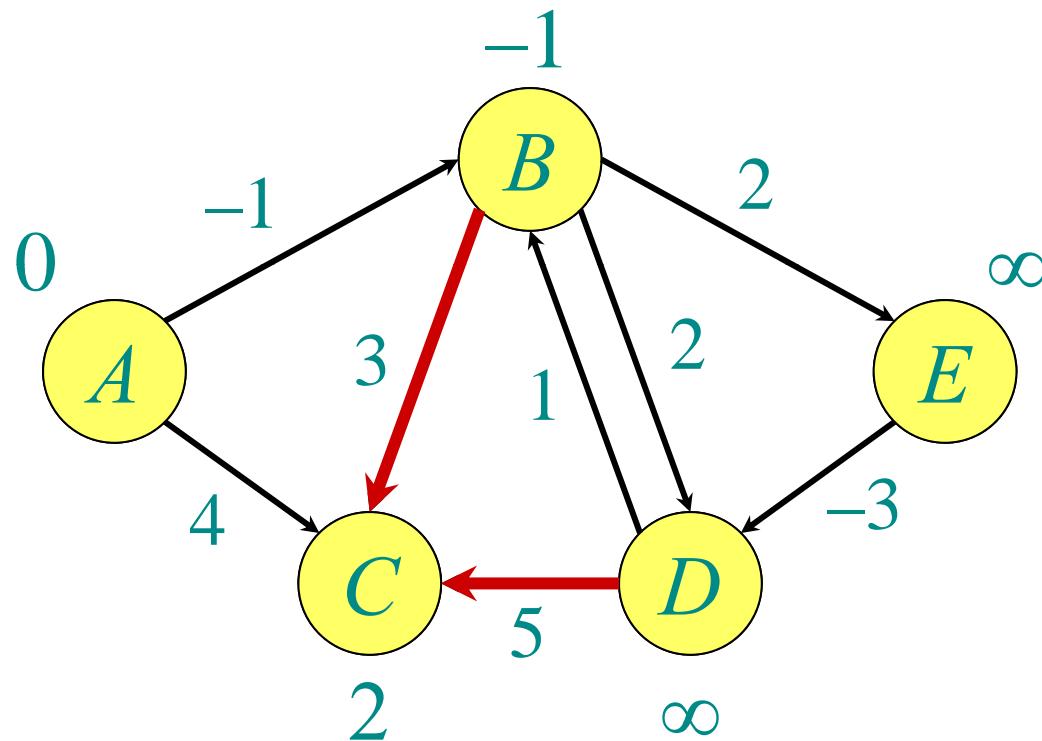


A	B	C	D	E
0	∞	∞	∞	∞
0	-1	∞	∞	∞
0	-1	4	∞	∞
0	-1	2	∞	∞




Example of Bellman-Ford

Order of edges: (B,E) , (D,B) , (B,D) , (A,B) , (A,C) , (D,C) , (B,C) , (E,D)

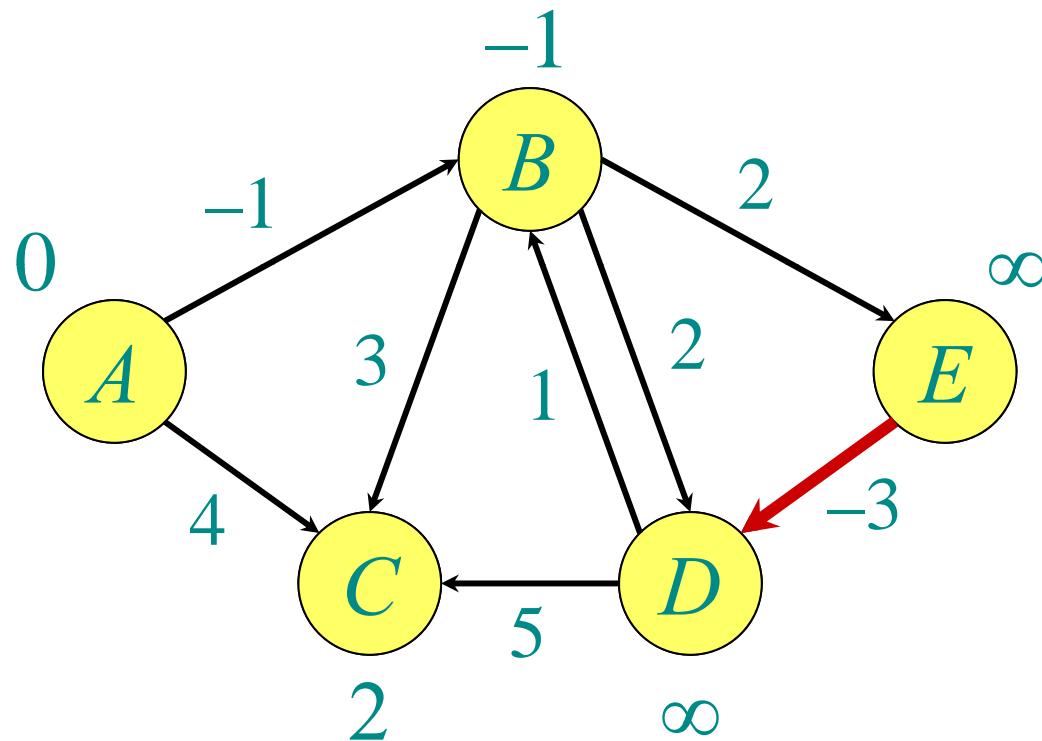


A	B	C	D	E
0	∞	∞	∞	∞
0	-1	∞	∞	∞
0	-1	4	∞	∞
0	-1	2	∞	∞




Example of Bellman-Ford

Order of edges: (B,E) , (D,B) , (B,D) , (A,B) , (A,C) , (D,C) , (B,C) , (E,D)

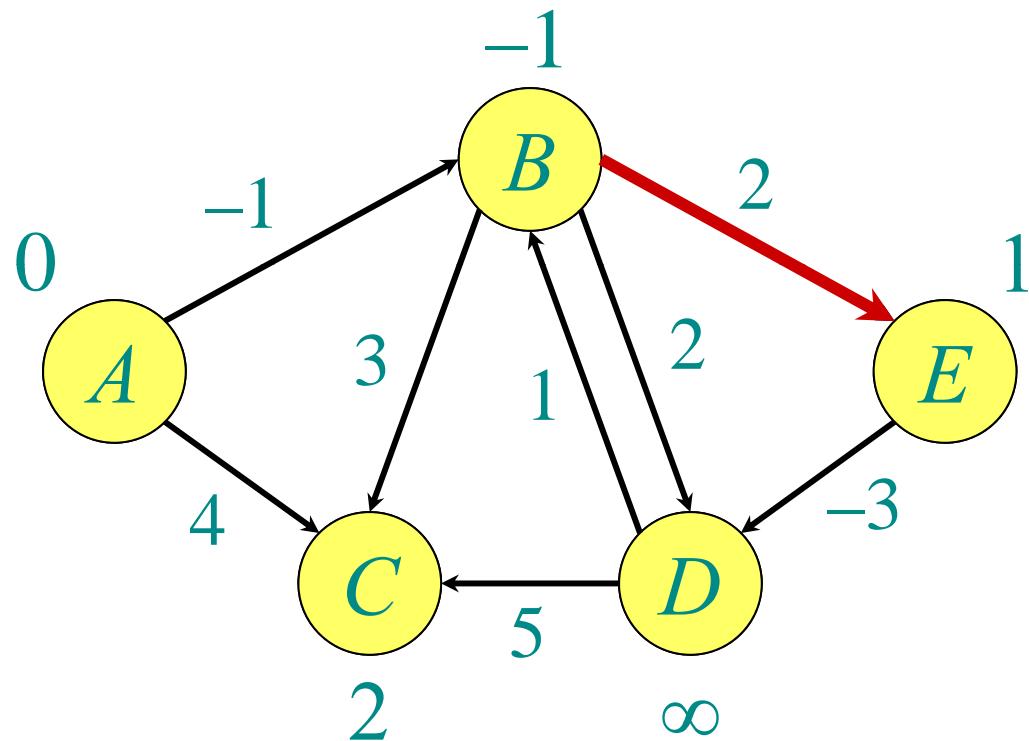


A	B	C	D	E
0	∞	∞	∞	∞
0	-1	∞	∞	∞
0	-1	4	∞	∞
0	-1	2	∞	∞
0	-1	2	∞	1




Example of Bellman-Ford

Order of edges: (B,E) , (D,B) , (B,D) , (A,B) , (A,C) , (D,C) , (B,C) , (E,D)

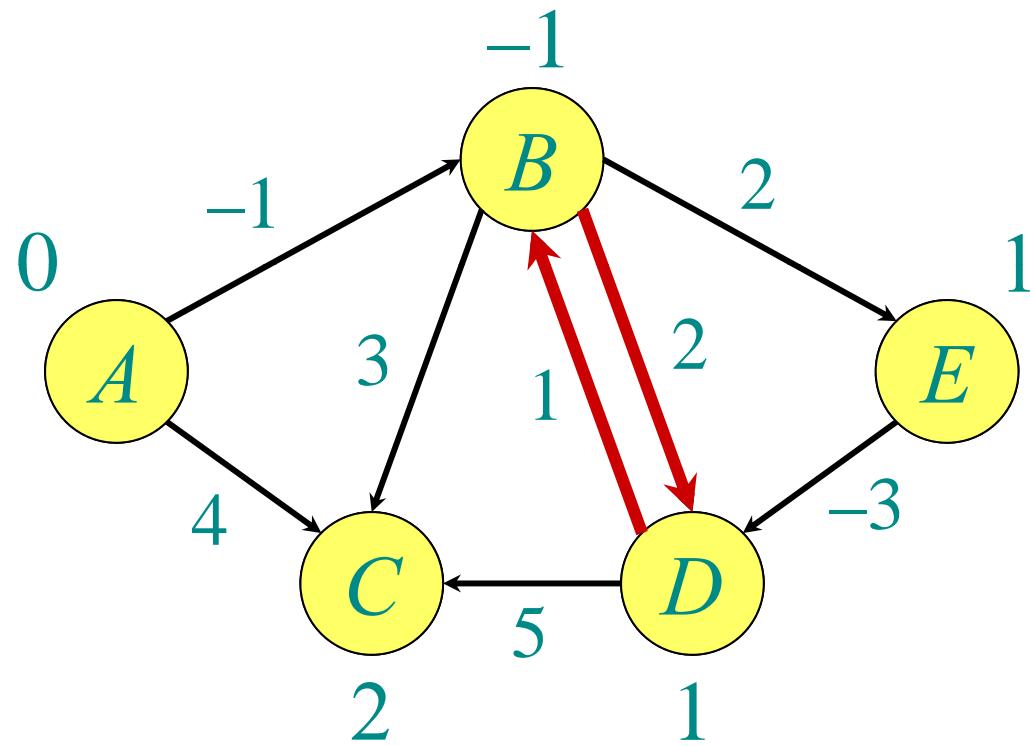


A	B	C	D	E
0	∞	∞	∞	∞
0	-1	∞	∞	∞
0	-1	4	∞	∞
0	-1	2	∞	∞
0	-1	2	∞	1
0	-1	2	1	1




Example of Bellman-Ford

Order of edges: (B,E) , (D,B) , (B,D) , (A,B) , (A,C) , (D,C) , (B,C) , (E,D)

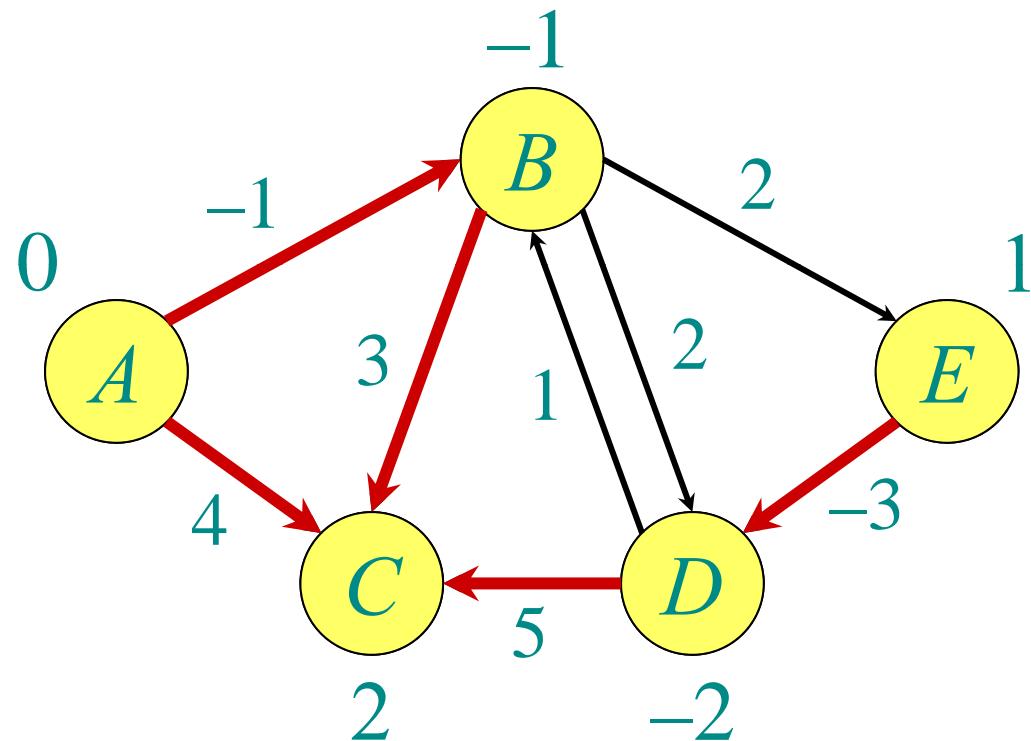


A	B	C	D	E
0	∞	∞	∞	∞
0	-1	∞	∞	∞
0	-1	4	∞	∞
0	-1	2	∞	∞
0	-1	2	∞	1
0	-1	2	1	1
0	-1	2	-2	1



Example of Bellman-Ford


Order of edges: (B,E) , (D,B) , (B,D) , (A,B) , (A,C) , (D,C) , (B,C) , (E,D)

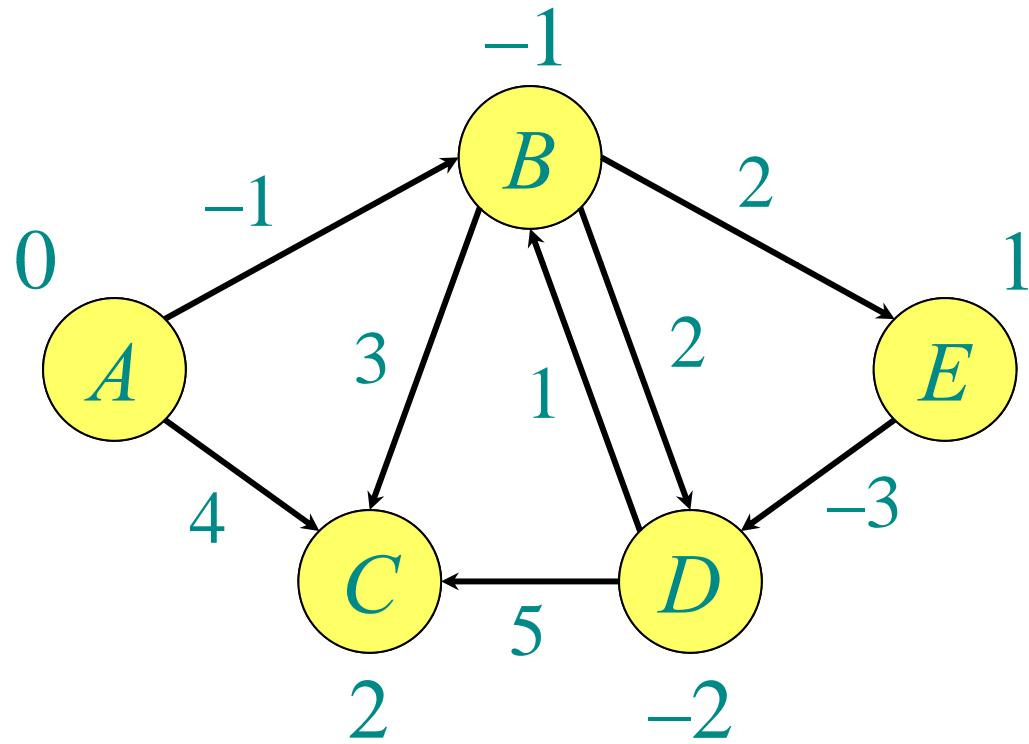

A	B	C	D	E
0	∞	∞	∞	∞
0	-1	∞	∞	∞
0	-1	4	∞	∞
0	-1	2	∞	∞
0	-1	2	∞	1
0	-1	2	1	1
0	-1	2	-2	1

Note: Values decrease monotonically.


... and 2 more iterations



Correctness


Theorem. If $G = (V, E)$ contains no negative-weight cycles, then after the Bellman-Ford algorithm executes, $d[v] = \delta(s, v)$ for all $v \in V$.

Proof. Let $v \in V$ be any vertex, and consider a shortest path p from s to v with the minimum number of edges.

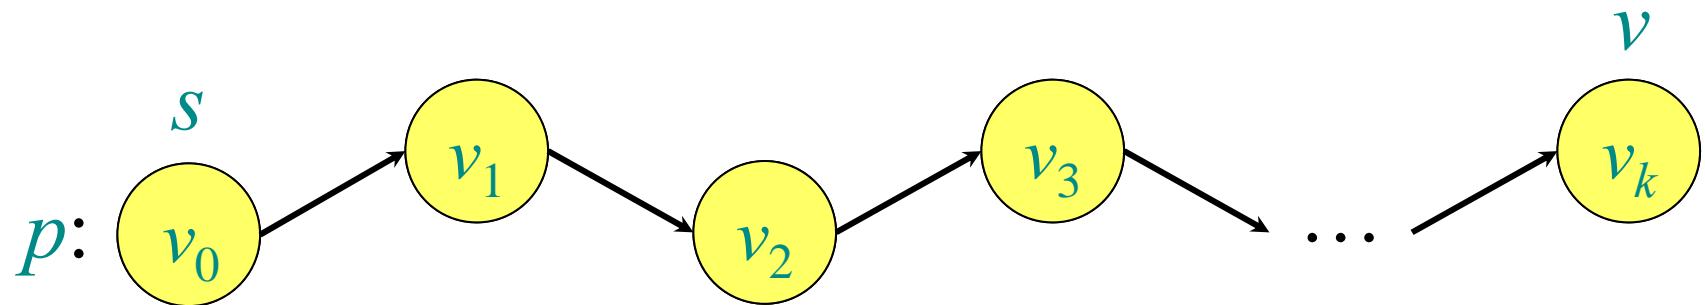


Since p is a shortest path, we have

$$\delta(s, v_i) = \delta(s, v_{i-1}) + w(v_{i-1}, v_i) .$$



Correctness (continued)

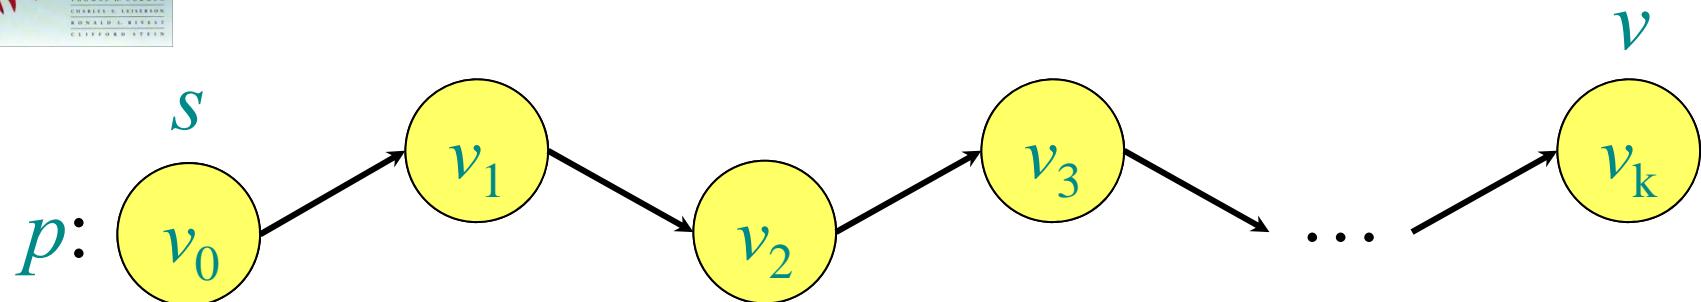


Initially, $d[v_0] = 0 = \delta(s, v_0)$, and $d[s]$ is unchanged by subsequent relaxations.

- After 1 pass through E , we have $d[v_1] = \delta(s, v_1)$.
- After 2 passes through E , we have $d[v_2] = \delta(s, v_2)$.

...


- After k passes through E , we have $d[v_k] = \delta(s, v_k)$.

Since G contains no negative-weight cycles, p is simple.
Longest simple path has $\leq |V| - 1$ edges. □



Detection of negative-weight cycles


Corollary. If a value $d[v]$ fails to converge after $|V| - 1$ passes, there exists a negative-weight cycle in G reachable from s . □




DAG shortest paths

If the graph is a *directed acyclic graph (DAG)*, we first *topologically sort* the vertices.

- Determine $f: V \rightarrow \{1, 2, \dots, |V|\}$ such that $(u, v) \in E \Rightarrow f(u) < f(v)$.

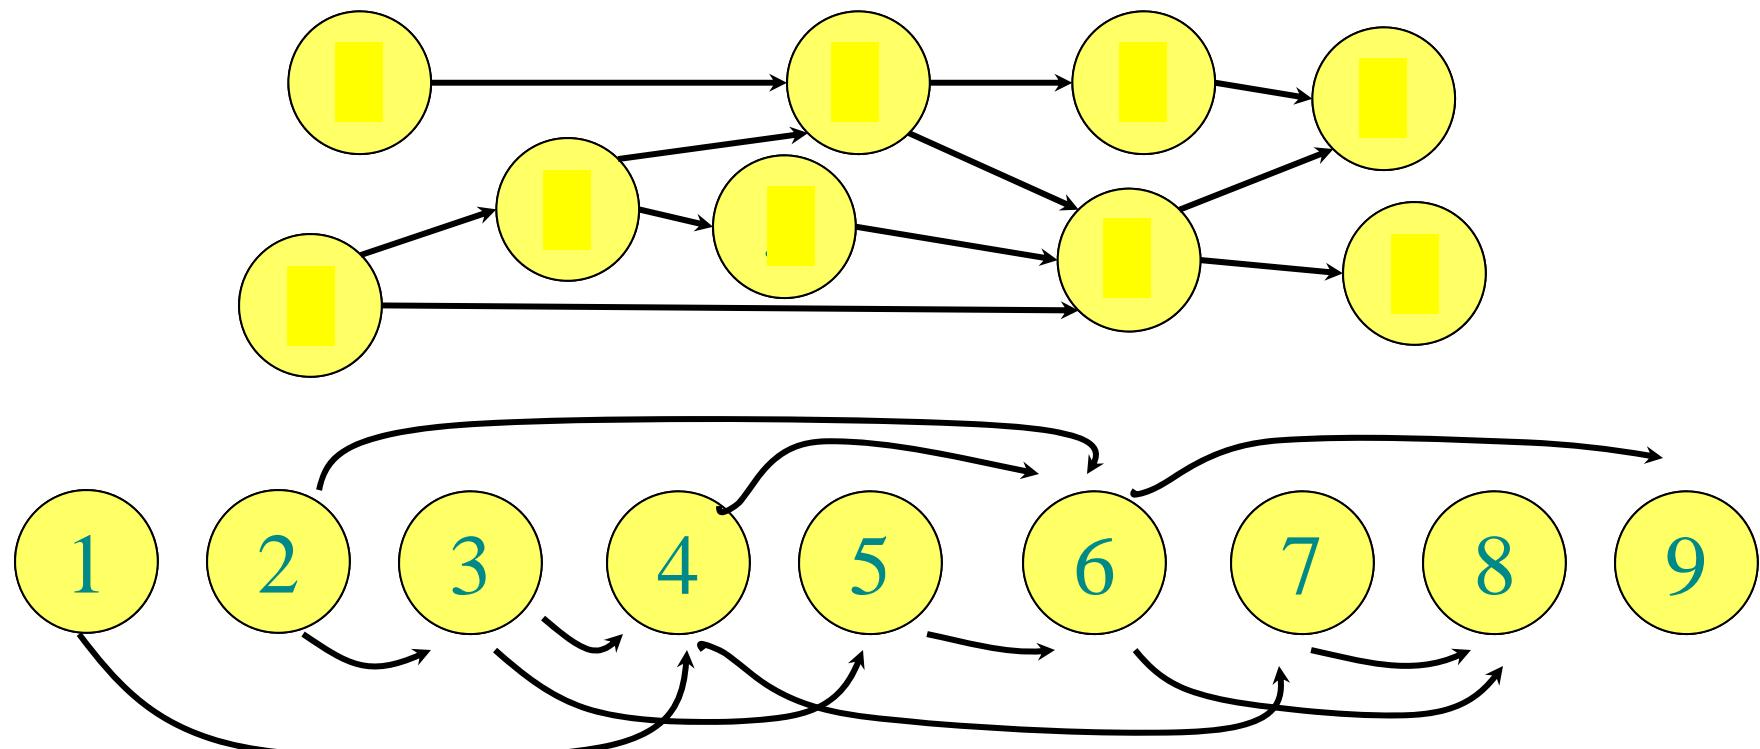





DAG shortest paths

If the graph is a *directed acyclic graph (DAG)*, we first *topologically sort* the vertices.

- Determine $f: V \rightarrow \{1, 2, \dots, |V|\}$ such that $(u, v) \in E \Rightarrow f(u) < f(v)$.
- $O(|V| + |E|)$ time

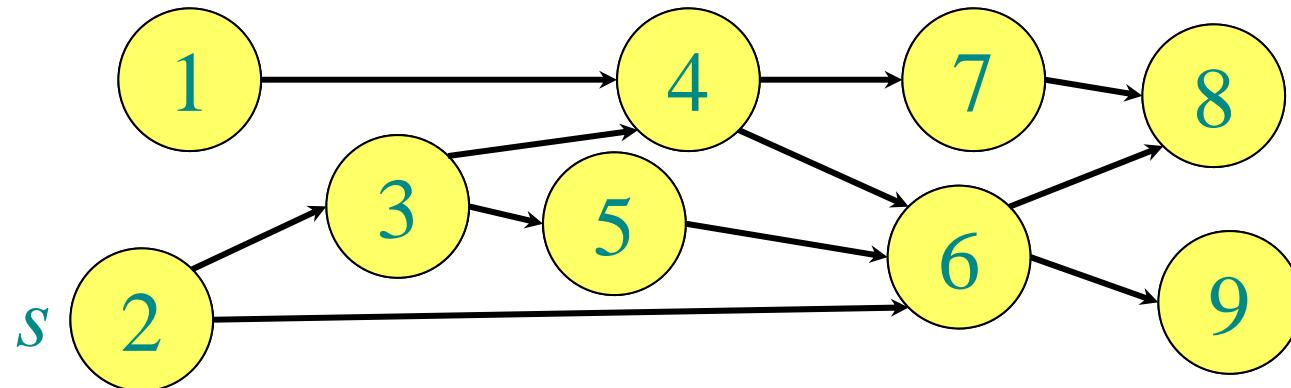

- Walk through the vertices $u \in V$ in this order, relaxing the edges in $\text{Adj}[u]$, thereby obtaining the shortest paths from s in a total of $O(|V| + |E|)$ time.




Shortest paths

Single-source shortest paths

- Nonnegative edge weights
 - Dijkstra's algorithm: $O(|E| \log |V|)$
 - General: Bellman-Ford: $O(|V||E|)$
 - DAG: One pass of Bellman-Ford: $O(|V| + |E|)$

All-pairs shortest paths

- Nonnegative edge weights
 - Dijkstra's algorithm $|V|$ times: $O(|V||E| \log |V|)$
- General
 - Bellman-Ford $|V|$ times: $O(|V|^2|E|)$
 - Floyd-Warshall: $O(|V|^3)$




All-pairs shortest paths

Input: Digraph $G = (V, E)$, where $|V| = n$, with edge-weight function $w : E \rightarrow \mathbb{R}$.

Output: $n \times n$ matrix of shortest-path lengths $\delta(i, j)$ for all $i, j \in V$.

Algorithm #1:


- Run Bellman-Ford once from each vertex.
- Time = $O(|V|^2|E|)$.
- But: Dense graph $\Rightarrow O(|V|^4)$ time.




Floyd-Warshall algorithm

- Dynamic programming algorithm.
- Assume $V=\{1, 2, \dots, n\}$, and assume G is given in an **adjacency matrix** $A=(a_{ij})_{1 \leq i,j \leq n}$ where a_{ij} is the weight of the edge from i to j .

Define $c_{ij}^{(k)}$ = weight of a shortest path from i to j with intermediate vertices belonging to the set $\{1, 2, \dots, k\}$.

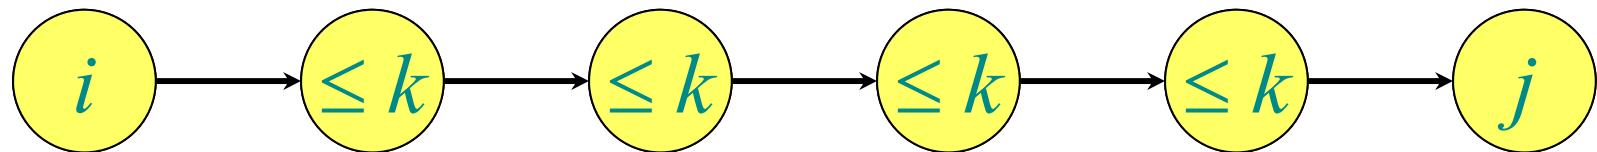

Thus, $\delta(i, j) = c_{ij}^{(n)}$. Also, $c_{ij}^{(0)} = a_{ij}$.




Floyd-Warshall recurrence


$$c_{ij}^{(k)} = \min \{ c_{ij}^{(k-1)}, c_{ik}^{(k-1)} + c_{kj}^{(k-1)} \}$$

Do not use vertex k

Use vertex k

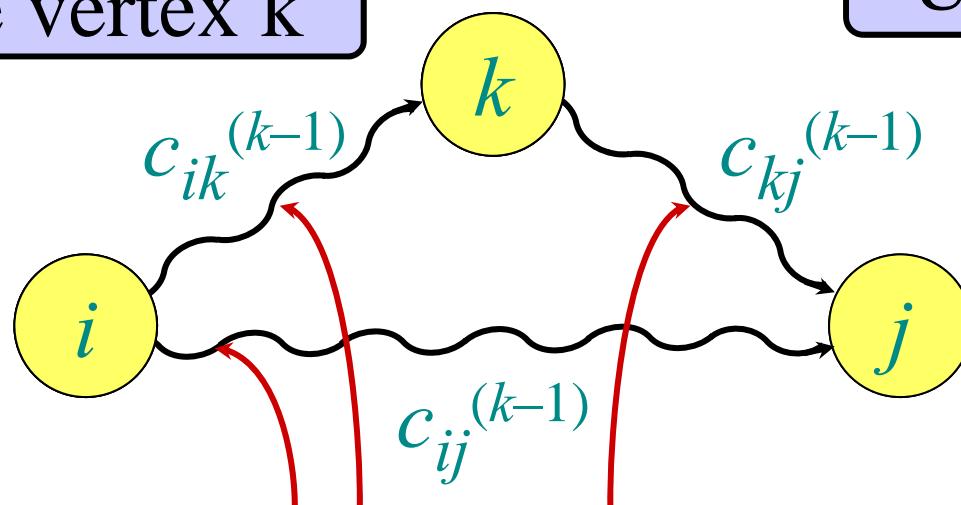


intermediate vertices in $\{1, 2, \dots, k-1\}$



Pseudocode for Floyd-Warshall

```
for  $k \leftarrow 1$  to  $n$  do
    for  $i \leftarrow 1$  to  $n$  do
        for  $j \leftarrow 1$  to  $n$  do
            if  $c_{ij}^{(k-1)} > c_{ik}^{(k-1)} + c_{kj}^{(k-1)}$  then
                 $c_{ij}^{(k)} \leftarrow c_{ik}^{(k-1)} + c_{kj}^{(k-1)}$ 
            } relaxation
        else
             $c_{ij}^{(k)} \leftarrow c_{ij}^{(k-1)}$ 
```

- Runs in $\Theta(n^3)$ time and space
- Simple to code.
- Efficient in practice.




Shortest paths

Single-source shortest paths

- Nonnegative edge weights
 - Dijkstra's algorithm: $O(|E| \log |V|)$
 - General: Bellman-Ford: $O(|V||E|)$
 - DAG: One pass of Bellman-Ford: $O(|V| + |E|)$
- } adj. list

All-pairs shortest paths


- Nonnegative edge weights
 - Dijkstra's algorithm $|V|$ times: $O(|V||E| \log |V|)$
 - General
 - Bellman-Ford $|V|$ times: $O(|V|^2|E|)$
 - Floyd-Warshall: $O(|V|^3)$
- adj. list
- adj. list
- adj. matrix



Johnson's algorithm

1. Compute a weight function \hat{w} from w such that $\hat{w}(u, v) \geq 0$ for all $(u, v) \in E$. (Or determine that a negative-weight cycle exists, and stop.)
 - Can be done in $O(|V||E|)$ time (details skipped)
2. Run Dijkstra's algorithm from each vertex using \hat{w} .
 - Time = $O(|V||E| \log |V|)$.
3. Reweight each shortest-path length $\hat{w}(p)$ to produce the shortest-path lengths $w(p)$ of the original graph.
 - Time = $O(|V|^2)$ (details skipped)

Total time = $O(|V||E| \log |V|)$.



Shortest paths

Single-source shortest paths

- Nonnegative edge weights
 - Dijkstra's algorithm: $O(|E| \log |V|)$
- General: Bellman-Ford: $O(|V||E|)$
- DAG: One pass of Bellman-Ford: $O(|V| + |E|)$

} adj. list

All-pairs shortest paths

- Nonnegative edge weights
 - Dijkstra's algorithm $|V|$ times: $O(|V||E| \log |V|)$
- General
 - Bellman-Ford $|V|$ times: $O(|V|^2|E|)$
 - Floyd-Warshall: $O(|V|^3)$
 - Johnson's algorithm: $O(|V||E| \log |V|)$

adj. list

adj. list

adj. matrix

adj. list